


Pro 85 SLIDING Serie

Technical Specifications


- An excellent system allowing single and double glazing.
- Bridged double rail system.
- Double slided sash applicability.
- Thanks to multi chambers system, water is discharged before accumulating in the frame cavity, (4-6 mm) and heat insulation (20-24-32 mm) application.
- Comfortable movement with rich accessories.
- Alternatives for terrace, balcony or inside of the house.

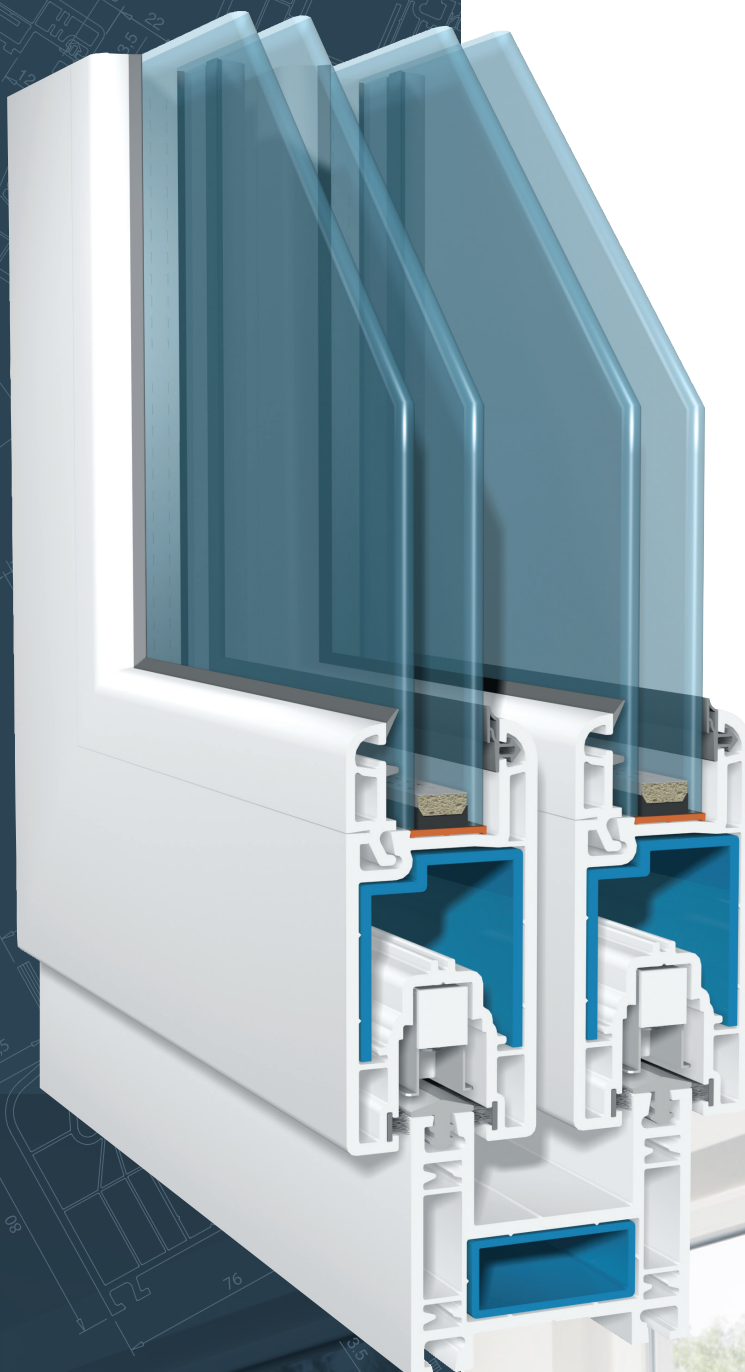


Pro 85 SLIDING
Serie




Pro85 SLIDING Serie

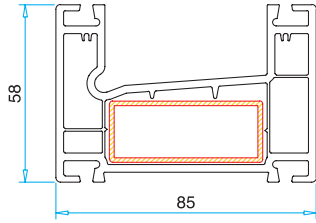


Double Rail Frame Profile
PRP.5500

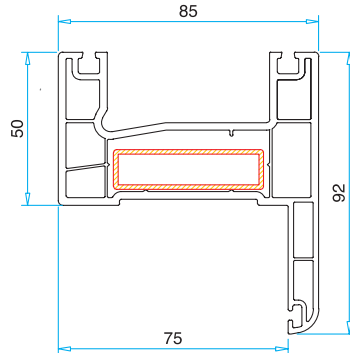


Double Rail Frame With Border Profile
PRP.5700

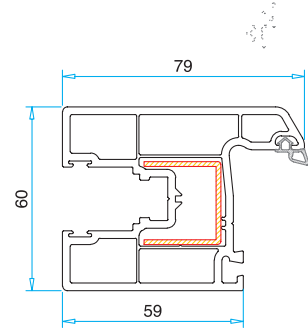


Sash Profile
PRP.5800

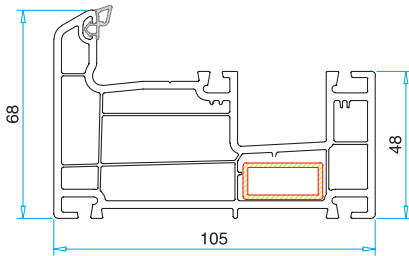


Single Rail Profile
PRP.5600




Interlock Profile
PRP.5350




4-6 mm Glazing Bead
PRP.6800




20 mm Glazing Bead
PRP.6802




24 mm Glazing Bead
PRP.6804




32 mm Glazing Bead
PRP.6806




Double Rail Frame
Reinforcement



Double Rail Frame With Border
Reinforcement




Sash
Reinforcement




Single Rail Frame
Reinforcement

Pro 85 SLIDING Serie


Technical Drawing

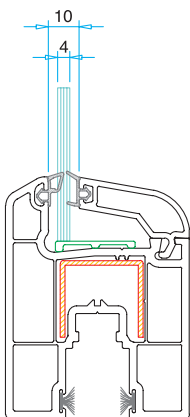


4-6 mm Glass

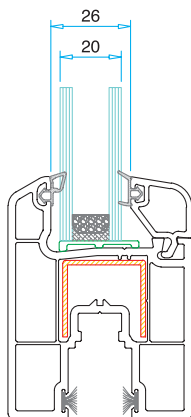

20 mm Glass

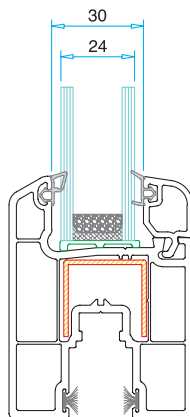

24 mm Glass

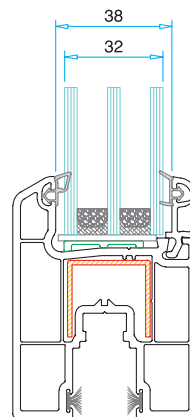

32 mm Glass

